



Mohr Guillotines

Mohr Guillotines


Mohr Guillotines

Mohr Guillotines are durable, programmable cutting machines with hydraulic drive. Quick-print shops, copy shops, commercial print shops, in-house printers value not only the uncomplicated operation, but also the long service life of the cutting machine. The unique cutting precision is obtained by the sturdy construction and the direct measurement.

The precise and gentle bevel swing cut is carried out hydraulically on all of our models. This allows adjusting the dwell time of the knife in the BDC to the respective material. The corrosion free table surface provides very easy gliding which makes the material easy to handle. On the Mohr Cutter 80, this effect is even supported by air jets, however on the 66 model the air jets are optional. The clamping pressure can be continuously adjusted within a large range by means of a turning knob with scale to suit any material to be cut. A variable pre-clamping time control optimizes cutting quality when dealing with different materials. Luminous LEDs indicate the cutting line to the operator.

The highlights

- Wide range of programming options
- Easy knife changing with automatic shutoff in bottom dead centre and fine adjustment from the front
- W A machine frame with optimized stability takes the forces produced during the cutting process in the best possible way and guarantees maximum cutting precision.
- Minimum expenditure of maintenance thanks to innovative materials
- Digital workflow integration

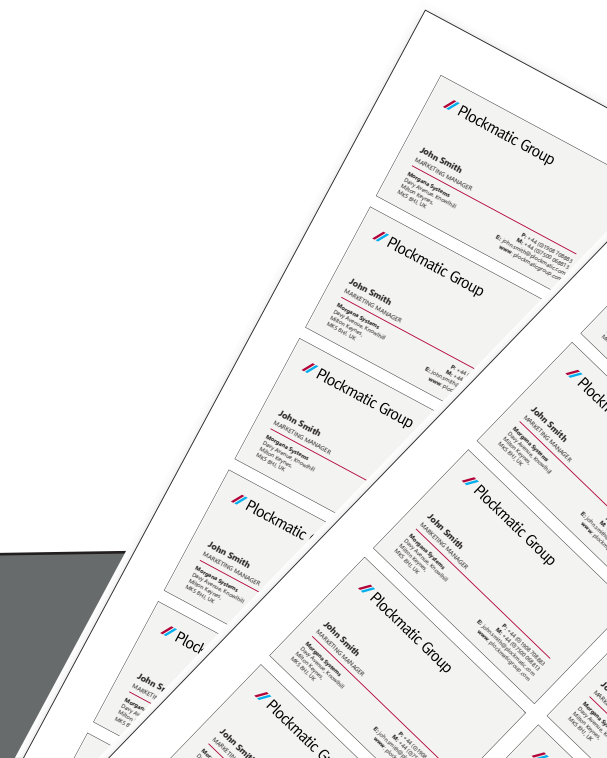

Mohr Guillotines

Mohr Guillotines provide the latest technology


The major technical features of the Mohr Guillotine are:



Linear ball bearing: maintenance-free and extremely precise.



A cutting stick ejector eases and abbreviates the knife change.

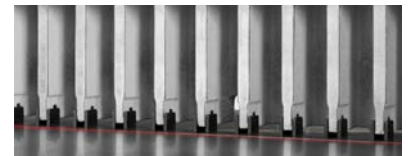

Backgauge rakes with spring loaded plastic gliders treat the table surface with care despite permanent contact.



LED cutting line indicator ensure optimum illumination, even when lighting is poor.




Knife depth can be conveniently adjusted from the front.



LED cutting line indicator ensure optimum illumination, even when lighting is poor.

Optional barcode reader

Once the **barcode** has been read the allocated **cutting program** is **automatically** started. There is no tedious searching for the **right cutting program**, consequently there will be **no** operating errors.

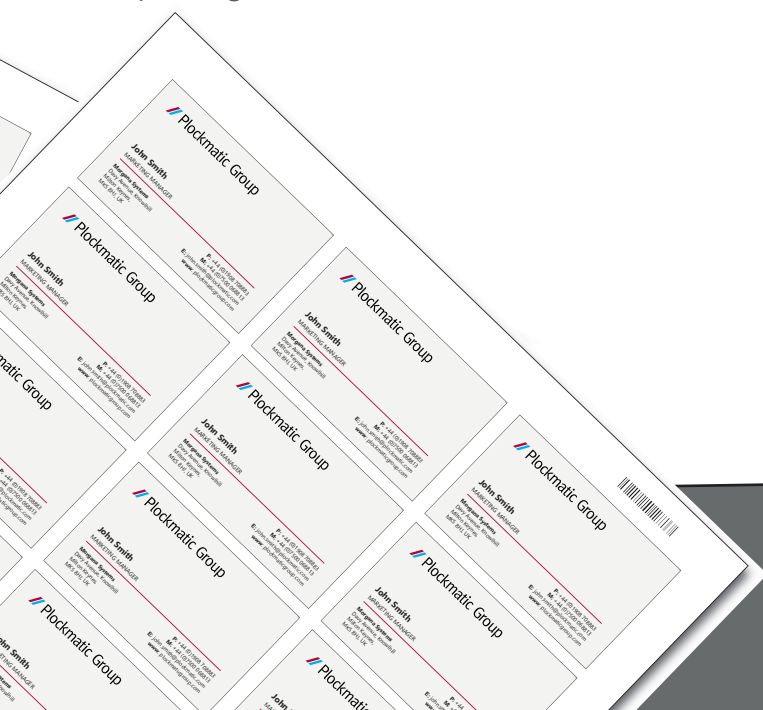

Mohr Guillotines

Mohr PLUS

Key Features

- Low-profile keyboard with easy-to-understand symbols
- Menu-driven knife change
- Programming during cutting
- Block programming available
- Format tables
- 198 program memory locations
- Program information with plain text
- Cutting cycle shown with symbols
- Programmable jogging mark
- Clamping time before cutting
- Programmable ejector
- Protect program
- Lubrication interval signal
- Option of digital workflow integration
- Process visualization for a graphic indication of material handling
- Production report for acquiring the machine performance data
- 1,998 Program memory positions
- Copy program

For digital workflow integration, the following options are available:

- Compucut® takes the cutting data supplied as ppf or jdf files direct from the prepress stage. Compucut® generates the cutting program automatically.
- A barcode reader enables the machine to start the cutting program automatically. This allows setup times to be reduced.

The machine is operated via an ergonomically arranged 18.5" touch-sensitive display. Repeat sequences can be saved and adapted at any time. To do so, the system has 1,998 memory positions available.

Process visualization gives the operator a graphic indication of the material handling. This reduces the likelihood of operating errors.





Mohr Guillotines

Measure up

	66	80
Cutting width:	670mm	800mm
Feed Depth:	670mm	800mm
Feeding height, max. (without false clamp plate)	80mm	100mm
Table depth:	670mm	800mm
Length of front table	670mm	670mm
Table height	900mm	900mm
knife speed (Cycles/min)	20	20
Blade drive:	Hydraulic	Hydraulic
Blade thickness:	9.7mm	9.7mm
Clamping system:	Automatic clamp	Automatic clamp
Backgauge:	Electric	Electric
Narrow cut:	15mm	15mm
Clamping pressure max	1500 daN	2700 daN
Clamping pressure min	200 daN	180 daN

Feeding height, max. (without false clamp plate)

- Cutting sticks (Set of 10 items)
- HSS-knives
- Carbide-tipped knives
- Knocking block
- Protektopur

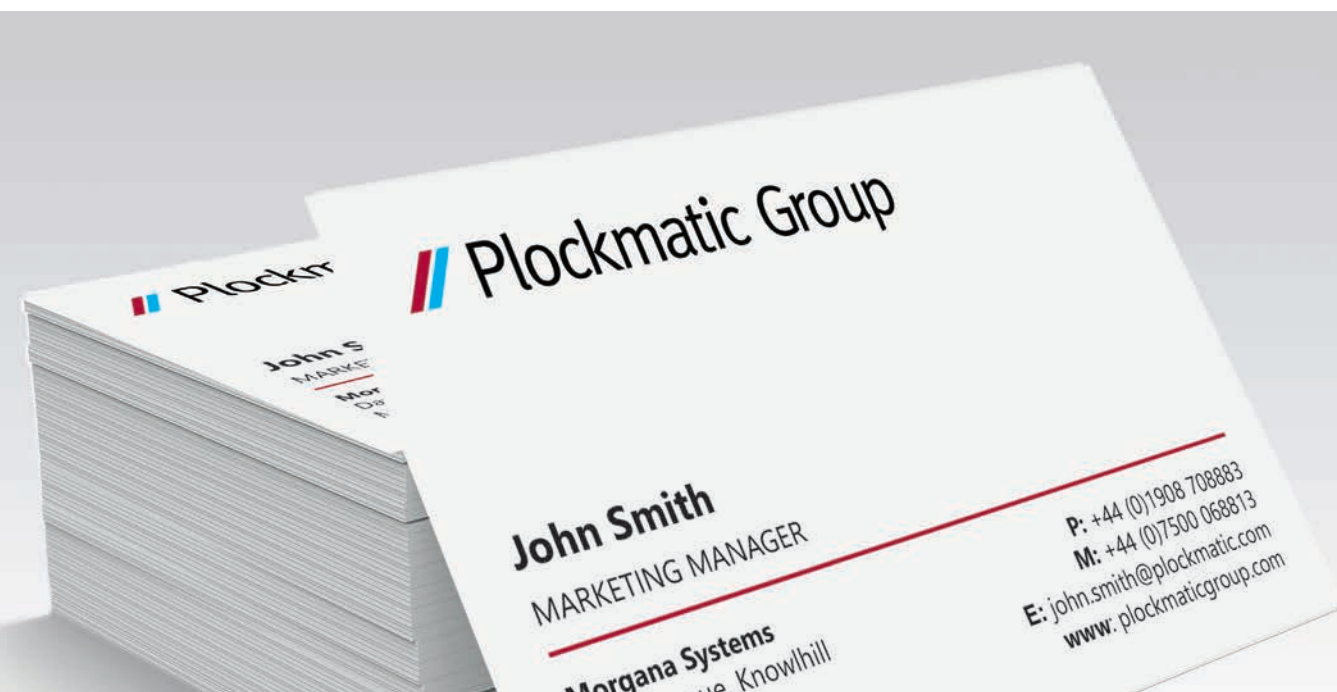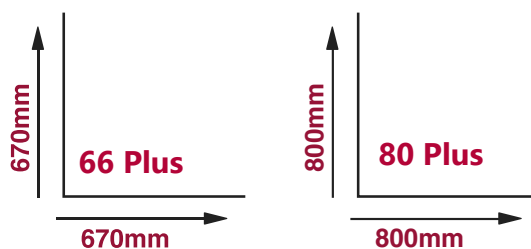

Technical Specifications

	66	80
Width (B)	1250mm	1430mm
Depth (A)	1825mm	1970mm
Height (E)	1500mm	1500mm
Net weight:	620kg	900kg
Static floor load:	330 daN/m ²	384 daN/m ²
Dynamic surcharge:	20%	20%
Power draw (KVA):	2,4	4
Thermal output:	7784	12973
Feed depth (C)	670mm	800mm
Length of front table (D)	670mm	670mm

