

Technical Specifications


Plockmatic DigiCoater Pro 400-LED

Paper Size (Minimum)	W3.9" x L10"
Paper Size (Maximum)	W15" x L28.5"
Supported Media	150 - 600gsm
Speed per min (LED)	65ft - 147ft (High speed option available)
Lamp technology	Air Cooled LED
Lifetime LED	20,000 hours on diodes
IR Station	optional
HD function / Module	optional
Applied coating	2-5g/m ²
Voltage	3 x 400V + N + G (EU)
Amperage	20amp - 400V (EU) / 32amp
Air knife	standard
Certifications	CE - ETL - UL/ULC (in progress)

Single sided coating system with
VFL feeder and mini stacker



Double sided coating system
with VF feeder and mini stacker

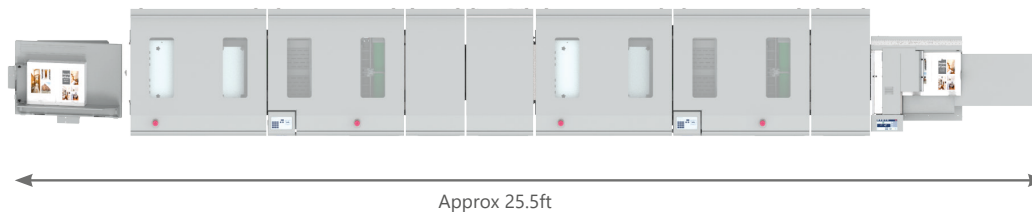

www.plockmaticgroup.com

***Disclaimer** As part of our continued product improvement plan, specifications and information published here are subject to change without notice. All specifications are dependent on application, type of stock, temperature, RH and print engine used. Specifications quoted were measured on uncoated and unprinted stock. E & OE.